


COPPERWOOD DRILLING

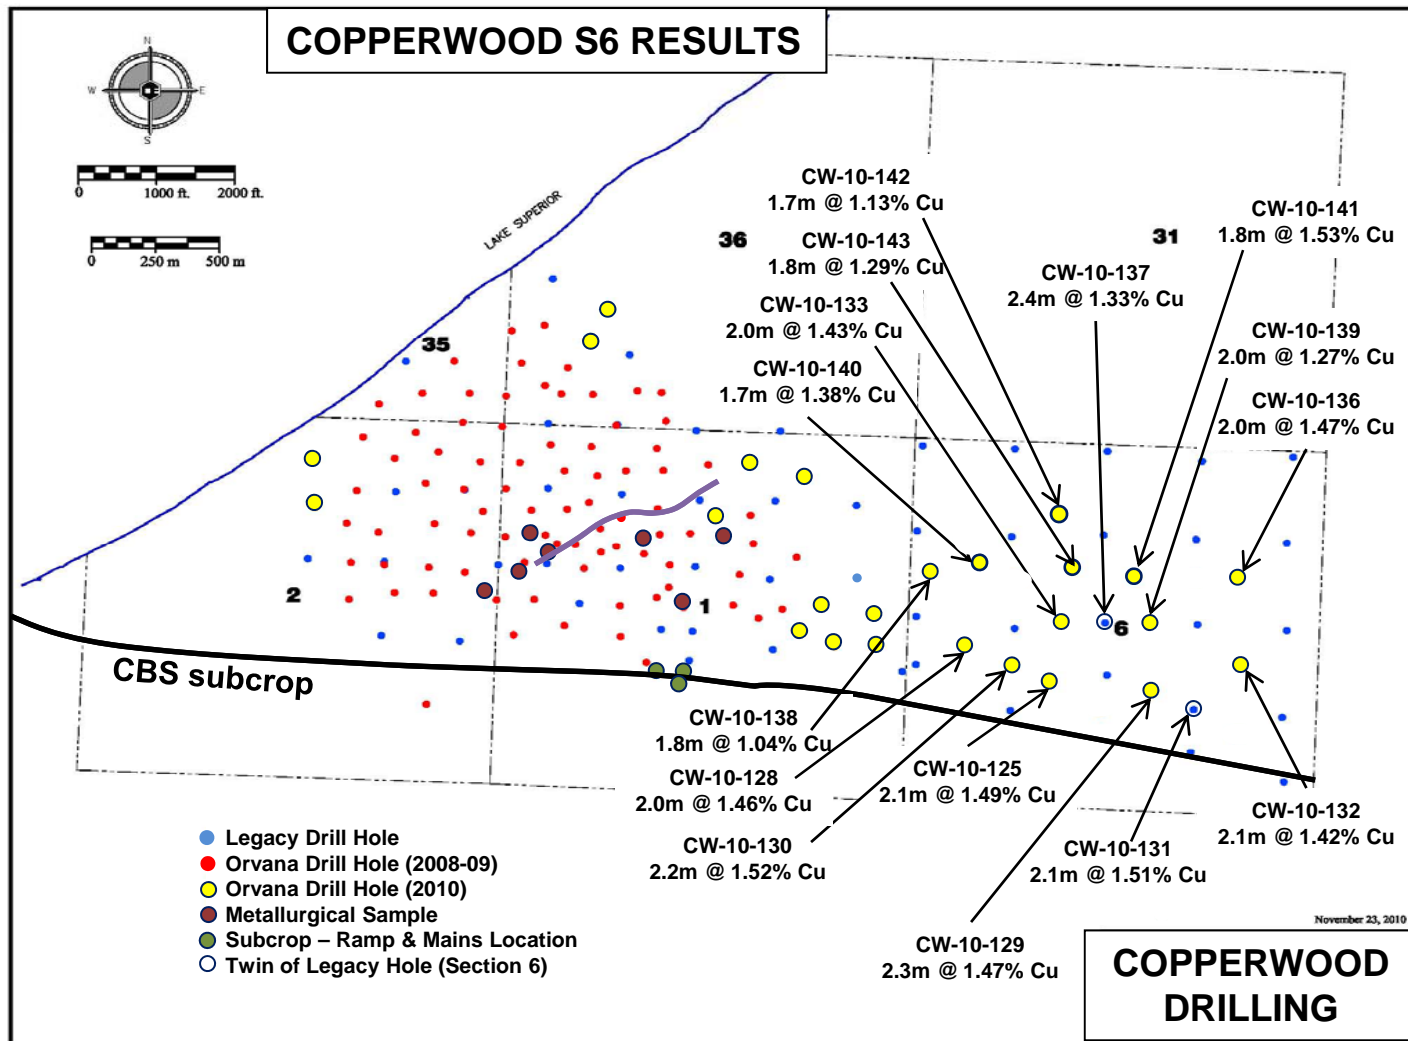

Note: Total depths and total thicknesses are reported. The mineralized units strike approximately 090 and dip approximately 7-12 degrees north. True thicknesses are between 96% and 99% of the total thicknesses reported herein. Multi-shot surveys from these vertical holes showed that the deviation is typically <1 degree.